# **Arboriculture accessories**






# **Root ball anchoring system**

### **Root ball anchoring system**

The root ball anchoring system stabilizes the tree during its implantation. It also secures the assembly against theft, due to its discretion and resistance. The set are made up of 3 hammered anchors, 3 brackets, 3 warn shackles, 3 special hooks and 1 ratchet strap.

Description	For trees	Reference	Packaging
System N° 1	Small tree size: 2 to 5 m (anchor of 500 mm and 5 m strap)	5050-042	1
System N° 2	Tree size: 5 to 10 m (anchor of 600 mm and 10 m strap)	5051-042	1
System N° 3	Tree size: 10 to 15 m (anchor of 1000 mm and 13 m strap)	5054-042	1

Installation tools: see page 14.

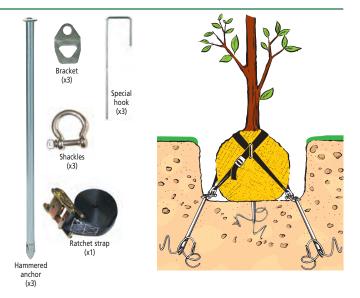

#### **USE**:



Installing the root ball.



Installing the hammered anchors (see page 15).



Installing the strap.





Tighten the strap.



Root ball before being covered



Root ball covered.



Phone: +33 (0)3 24 33 70 70 Fax: +33 (0)3 24 32 84 93 contact@faynot.com



# **Tree guying**

## Tree guying with hammered anchor

Allows trees to be secured, without injuring them.

Description	Reference	Packaging
Ratchet strap 5 m	5047-042	1
Ratchet strap 10 m	5048-042	1
Ratchet strap 13 m	5053-042	1
500 mm hammered anchor*	510-044	50
600 mm hammered anchor*	610-044	50
Reinforcement cross	17100-044	50
200 mm standard extension	400290-044	50

<sup>\*</sup>Installation tool: see page 14.









Tree guying with screw-in anchoring disk

Allows trees to be secured, without injuring them.

Description	Reference	Packaging
Ratchet strap 5 m	5047-042	1
Ratchet strap 10 m	5048-042	1
Ratchet strap 13 m	5053-042	1
Reinforcement cross	12100-044	50
Fixgrip anchoring disk	see page 20	100









Phone: +33 (0)3 24 33 70 70 Fax: +33 (0)3 24 32 84 93 contact@faynot.com

# **Accessories**

#### **Branches bender**

The branches bender allows to arch a branch without damaging it, throughout its growth. It "clips" directly onto the branch.


The purpose is to bend the branch to 60 degree angle, to increase fruit buds production.

Different angles and wire diameters are possible to adapt to each tree and their growing environment.

Galvanized steel wire Ø 5.2 mm.

Adapts to branches from Ø 5 to Ø 30 mm.

Different angles  $\alpha$ : on request.

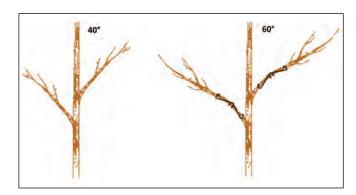





Branches bender.


### **Reusable corkscrew anchors**

Corkscrew shaped anchors are well known for their simplicity. Reusable, they are suitable for loose ground (limited tensile resistance).

Dimension Ø x L	Coating	Reference	Packaging
Ø 5.2 x 150 mm	Galva	55150-044	50
Ø 7 x 170 mm	Galva	57170-044	50

Conical corkscrew anchors: see page 21.

#### USE:







Corkscrew anchor during driving. Scan to view the video.



# **Traceability disk**

#### **Engraved identity disk and management software**

Colored aluminium identification disk with a unique number or custom-engraved.

This makes it possible to identify each area or row and thus to follow each operation (pruning, treatments... by whom and when...). We provide a web application (compatible with smartphone, tablet and computer) specially designed to manage the data associated with the disk.

Washers available in Ø 25 and Ø 40 mm with Ø 5 mm hole.

Description	Reference	Packaging
Brown disk Ø 25 mm*	9804-047	50
Brown disk Ø 40 mm*	9607-047	50
Striated nail Ø 4 x 25 mm	4025-047	100

<sup>\*</sup>Other colors available, on request.



Engraved identity disk on tree.



Home page







Disk Ø 40 mm and hole Ø 5 mm



Groupe	Champ	Contenu	Modification
	Site	Square Klein- Winternheim	Modif >>
	Essence	Erable Plane	Modif >>
	Diamètre	50	Modif >>
	Position_GPS	O Test	Modif >>
Groupe	Champ prive	Contenu privé	Modification
	Port	SL	Modif >>
	Vg_	Moyenne	Modif >>
	VL.	2	Modif >>
	Stad	Adulte	Modif >>
	Détauts_Remarques	Racinés étrangleuses	Modif >>
	Sum	3	Modif >>
	Etat_de_santé	Médiocre	Modif >>
	Préconisations	Enlever le bols mort	Modif >>
	Rapport	<b>\$</b> 240118	Modif >>
	An	chiver	

Data





Phone: +33 (0)3 24 33 70 70 Fax: +33 (0)3 24 32 84 93 contact@faynot.com

