

Fixings of furniture in the ground



Wooden posts fixing
to the ground..... p. 80

Wooden furniture securing..... p. 81

Various anchors..... p. 82

Fixings of furniture
in the ground

Wooden posts fixing to the ground




Post anchor in the ground

For quick fixing of wooden sign posts in the ground.
Anchor system made up of a special hot-dip galvanized hammered anchor and a reinforcement cross, increasing the lateral resistance.
The hammered anchor has an upper part above the ground, allowing the pre-drilled wooden post (\varnothing 21 x 200 mm) to be fitted on it.

| Description | Reference | Packaging |
|--|-----------|-----------|
| 800 mm hammered anchor \varnothing 21 mm collar collar offset by 200 mm* | - | - |
| Reinforcement cross H 100 mm for hammered anchor \varnothing 21 mm | 21100-044 | 50 |

Driving tool ref. 210800-047, sleeve ref. 216002-047,
split plate ref. 2017-044.
Particular care must be taken when installing the anchor and when drilling the post in order to have good verticality.
The fact of anchoring in the ground more or less soft, will never have the same resistance as concrete.
Delivered unassembled.
*Contact us for production time.

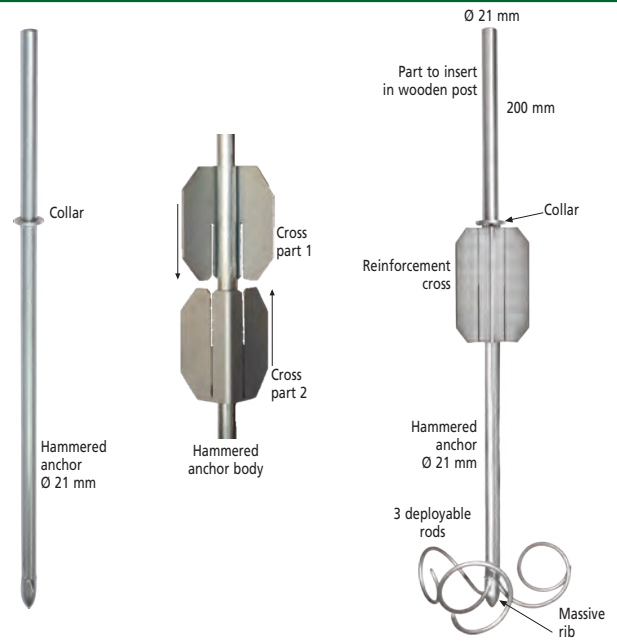

Install the cross.



Driving in the hammered anchor.



Deploy rods using the sleeve and the split plate.



Fitting of the wooden post on the hammered anchor.




Wooden furniture securing

Furniture securisation in the ground

Maintain wood furniture with 4 stable feet, using hammered anchor and arms fixed by wood screws.


| Description | Reference | Packaging |
|-----------------------------------|-----------|-----------|
| 500 mm hammered anchor | 510-044 | 50 |
| Galvanized arm Ø 5.2 mm | - | - |
| Galvanized wood screw Ø 6 x 40 mm | 16040-021 | 100 |

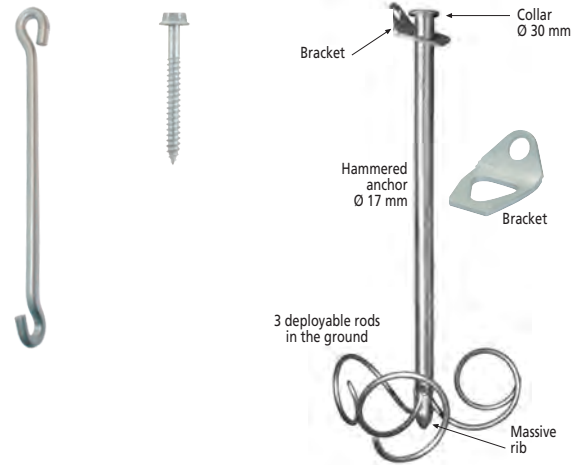

Furniture securisation in the ground

Maintain wood furniture with 4 stable feet, using hammered anchor and plate fixed by wood screws.

| Description | Reference | Packaging |
|-----------------------------------|-----------|-----------|
| 500 mm hammered anchor | 511-044 | 50 |
| Special plate | 10060-044 | 50 |
| Galvanized wood screw Ø 6 x 40 mm | 16040-021 | 100 |

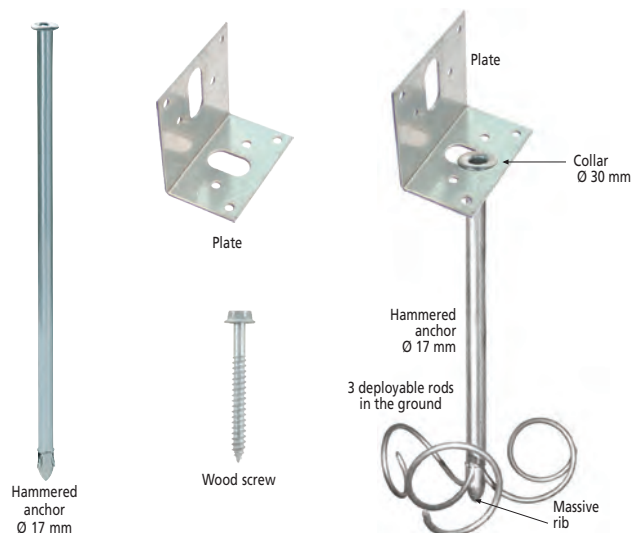

Various anchors

Border anchoring

Requires a pre-drilling of \varnothing 24 mm in the element.
Is used for fixing borders, wooden edge in landscaping, parking wheel stops.

| Anchor | Reference | Packaging |
|------------------------|-----------|-----------|
| 350 mm hammered anchor | 350-047 | 50 |
| 500 mm hammered anchor | 511-044 | 50 |

Tools, see page 14.



2 holes helical anchoring disk

Manufactured in a very high steel, the helical anchoring disk has hot-dip galvanized protection.

The \varnothing 120 mm disk fit the galvanized steel rod and having an M7 thread of 80 mm length.

Anchoring adapted for loose ground.

| Description | Reference | Packaging |
|-----------------------------------|------------|-----------|
| 2-hole anchoring disk | 123-044 | 50 |
| Galvanized rod | - | 10 |
| Galvanized nut \varnothing 7 mm | 2607-043 | 100 |
| Manual tubular driving tool | 102050-044 | 1 |



Thread \varnothing 7 x 1.50 mm
Long. 80 mm

Rod \varnothing 6 mm



Anchoring disk
 \varnothing 120 mm
2 oblong holes

Anchoring
dish on rod

